Serie C · carretillas multidireccionales diésel / GLP

- Cabina montada sobre soportes de goma, transmisión hidrostática de 3 ruedas, dirección con detección de carga y posicionamiento de ruedas con palanca de 4 vías.
- Motor Kubota V1505-T diésel (32 kW) o Toyota 4Y de 2,2 l GLP (42 kW); sistema eléctrico de 12 V y enfriador de aceite hidráulico.

Modelo	Capacidad	Peso en vacío	Elevación std.	Largo total	Distancia entre ejes	Radio mín.	Velocidad
C2500	2.500 kg	4.500 kg	4.040 mm	1.900 mm	1.528 mm	1.905 mm	14 km/h
C3000	3.000 kg	4.900 kg	4.040 mm	2.250 mm	1.878 mm	2.200 mm	14 km/h

COMBi-STE · carretilla multidireccional eléctrica con operador de pie

- Tecnología de motor AC con 2 motores de tracción de 80 V · 5 kW y bomba de 80 V · 19 kW; tracción eléctrica en 2 ruedas.
- Operador de pie (cabina con asiento disponible como opción), dirección con detección de carga y posicionamiento de ruedas de 4 vías.

Modelo	Capacidad	Peso en vacío	Elevación std.	Largo total	Distancia entre ejes	Radio mín.	Velocidad
COMBi-STE C2500	2.500 kg	6.250 kg	4.040 mm	2.000 mm	1.580 mm	1.870 mm	10 km/h
COMBi-STE C3000	3.000 kg	6.450 kg	4.040 mm	2.000 mm	1.580 mm	1.870 mm	10 km/h
COMBi-STE C4000	4.000 kg	6.650 kg	4.040 mm	2.100 mm	1.730 mm	2.000 mm	10 km/h

Datos comunes

- Serie C: pendiente superable 10 %, anchura 1.930 mm, altura sobre cabina 2.345 mm, altura de mástil replegado 2.655 mm y elevación máxima con mástil extendido de 4.760 mm.
- COMBi-STE: pendiente superable 10 %, batería de 80 V · 465 Ah, altura de mástil replegado 2.830 mm y elevación máxima con mástil extendido de 5.185 mm.
- Color estándar verde y gris. Las especificaciones pueden variar según opciones y país; consulte con nuestro equipo comercial.

Datos extraídos de las fichas técnicas del fabricante. Combilift se reserva el derecho a modificar las especificaciones sin previo aviso.

C-SERIES
C2500-C3000

COMBILIFT
LIFTING INNOVATION

The multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.

EUROPEA

europeadecarretillas.com
Distribuidor Combilift

C-SERiES
C2500–C3000

FRONTAL MODE

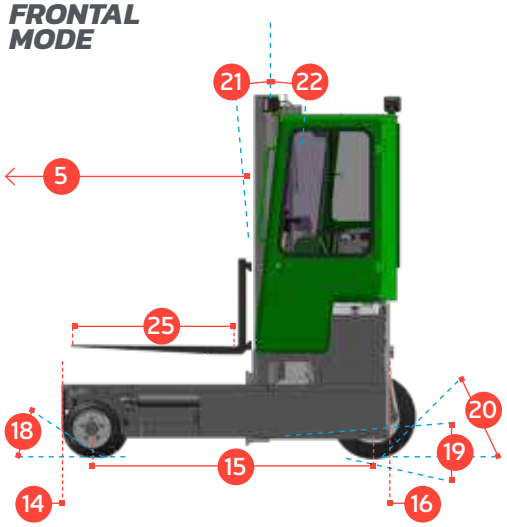

SiDEWARD MODE

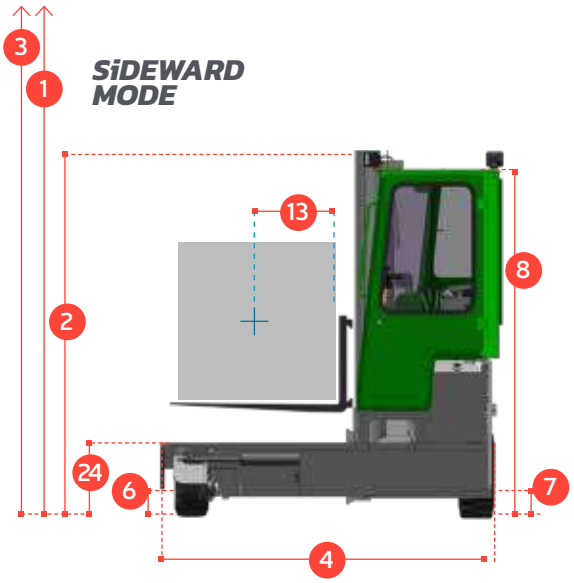

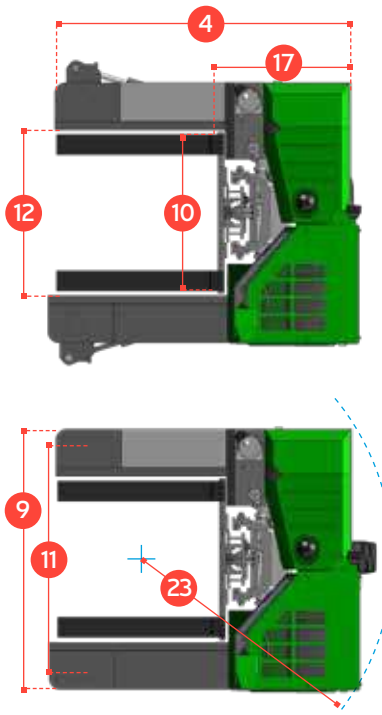

REF.	DESCRIPTION	C2500	C3000
1a	Standard Lift Height	4040 mm	
1b	Free Lift Height	0mm	
2	Height Mast Closed	2655mm	
3	Max. (Mast Raised)	4760mm	
4	Overall Length	1900mm	2250mm
5	Mast Travel	900mm	1250mm
6	Ground Clearance Under Mast	150mm	
7	Ground Clearance to Wheelbase Centre	135mm	
8	Height Over Cab or of Overhead Guard	2345mm	
9	Width	1930mm	
10	Outside Spread of Fork Arms	1200mm	
11	Track Front	1730mm	
12	Frame Opening	1230mm	
13	Load Centre Distance	600mm	
14	Overhang Front	205mm	
15	Wheel Base	1528mm	1878mm
16	Overhang Back	167mm	
17	Length from Face of Fork	1100mm	
18	Approach Angle	45°	
19	Ramp Angle	17°	
20	Departure Angle	45°	
21	Forward Tilt	2°	
22	Backward Tilt	4°	
23	Minimum Outside Radius	1905mm	2200mm
24	Platform Height	495mm	
25	Platform Length	800mm	1150mm
A	Capacity	2500kg	3000kg
B	Unladen Weight	4500kg	4900kg
C	Maximum Ground Speed	14km/h	
D	Gradeability	10%	
E	Kubota V1505-T Diesel / 2.2 ltr Toyota 4Y Engine LPG	32kW/ 42kW	
F	Electrics	12 Volt	
G	Fork Sections 50mm x 150mm x	800mm	1150mm
H	200/50 x 10 Front Tyre	OD 406mm / Width 178mm	
I	23 x 10-12 Rear Tyre	OD 580mm / Width 240mm	
J	Standard Colour	Green and Grey	
K	Suspension Seat	KAB Model 116	

European Patent No. 2167416; Brazilian Patent No. P10811954-6; Australian Patent No. 2008253242

Multi-Directional

Features Include:

- Rubber Mounted Cabin
- Multi-Direction Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 Way Lever Positioning of Wheels
- Hydraulic Oil Cooler

Distributed by:

EUROPEA

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.

COMBi-STE 2500-4000

COMBiLiFT
LiFTING INNOVATION

The multi-directional, electric, stand-on forklift designed for the safe, space saving and productive handling of long and bulky loads.

EUROPEA

europeadecarretillas.com

Distribuidor Combilift

COMBi-STE 2500-4000

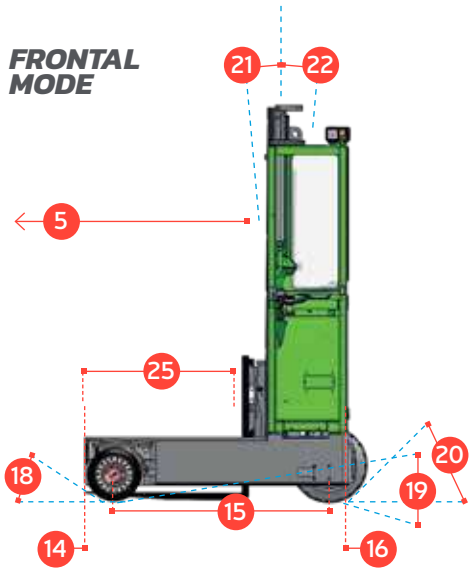

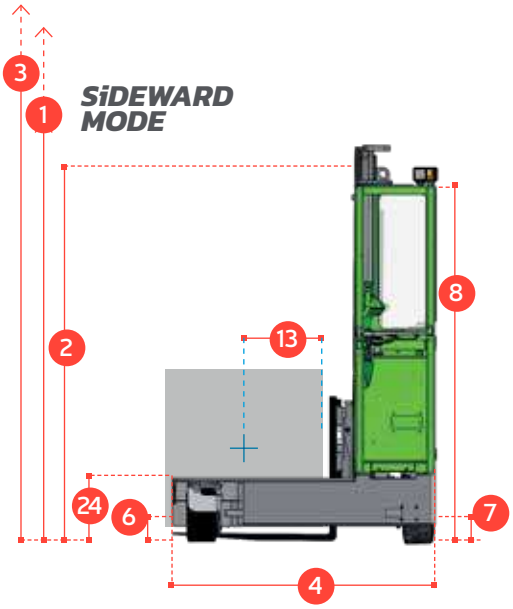

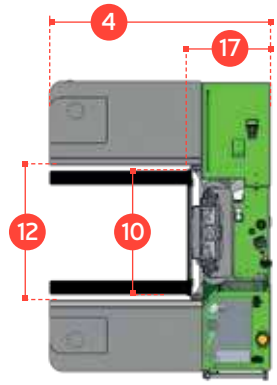



REF.	DESCRIPTION	C2500	C3000	C4000
1a	Max. Lift Height		4040mm	
1b	Freelift Height		0mm	
2	Height Mast Closed		2830mm	
3	Max. (Mast raised)		5185mm	
4	Overall Length	2000mm		2100mm
5	Mast Travel		1300mm	
6	Ground Clearance Under Mast		230mm	
7	Ground Clearance to Wheelbase		150mm	
8	Height Over Cab (Without work lights)		2730mm	
9	Platform Width	2645mm		2914mm
10	Outside Spread of Fork Arms	1150mm		1350mm
11	Track Front	2085mm		2305mm
12	Frame Opening	1230mm		1500mm
13	Load Centre Distance		600mm	
14	Overhang Front		235mm	
15	Wheelbase	1580mm		1730mm
16	Overhang Back		135mm	
17	Length From Face of Fork	800mm		900mm
18	Approach Angle		45°	
19	Ramp Angle		17°	
20	Departure Angle		45°	
21	Forward Tilt		4°	
22	Backward Tilt		4°	
23	Minimum Outside Radius	1870mm		2000mm
24	Platform Height		480mm	
25	Platform Length		1200mm	

A	Capacity	2500 kg	3000 kg	4000 kg
B	Unladen Weight	6250 kg	6450 kg	6650 kg
C	Maximum Ground Speed		10 km/h	
D	Gradeability		10%	
E	Battery Capacity		80 V / 465 Ah	
F	Fork Section	125 x 50 x 1200mm		150 x 50 x 1200mm
G	405 / 305 - 260 Front Tyre (Solid)		OD 405mm / Width 260mm	
H	23 x 10 - 12 Rear Tyre (Super Elastic)		OD 580mm / Width 240mm	
I	Standard Colour		Green & Grey	
J	AC Electric Traction Motor x 2		80 V / 5 kW	
K	AC Electric Pump Motor		80 V / 19 kW	

PCT Patent Application No. PCT/EP2014/053066; UK Patent Application No. GB1302811.3

Multi-Directional

Features Include:

- Rubber Mounted Cabin
- Multi-Direction Operation
- AC Motor Technology
- Load Sensing Steering
- 2 Wheel Electric Drive
- Stand-up Operator
- (Sit Down Cabin Option Available)

Distributed by:

EUROPEA

COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.